

Portalampada Edison

Edison Lamp-holders




ATTACCO/ CAP

E40

Art. 077

Per lampade ad incandescenza
e scarica

*For incandescent lamps and
discharge lamps*

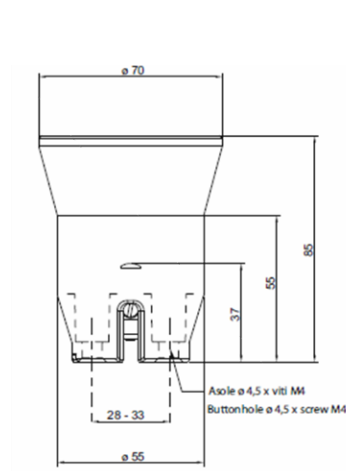

DATI TECNICI

TECHNICAL DATA

Tensione nominale:	500 V
Corrente nominale:	16 A
Temperatura di funzionamento:	T210°C
Tensione d'impulso max:	5 kV
Categoria di tenuta all'impulso:	III
Tipo di connessione conduttori:	Morsetto
Capacità connessione morsetti:	1 ÷ 4 mm ²
Corpo in porcellana	
Contatto centrale in bronzo fosforoso nichelato	
Virola in lastra di ottone nichelato	
Conforme direttiva:	2006/95/CE

Rated voltage:	500 V
Rated current:	16 A
Nominal highest working temp.	T210°C
Maximum rated pulse voltage	5kV
Impulse withstand category	III
Type of connection	Terminal
Terminals connection capacity:	1 ÷ 4 mm ²
Porcelain body	
Nickel-plated phosphor bronze central contact	
Brass plate nickel plated bulb screw base	
In conformity with directive	2006/95/CE


Portalampada *lamp-holder*



versioni disponibili / *available versions*

Ø77/AM

Portalampada E40. Interasse 28÷33mm con molla antisvitamento

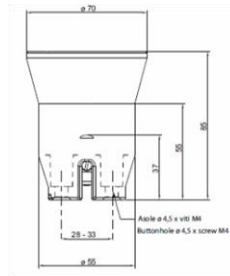


Ø77/AM

Porcelain lampholder E40. Fixing wheelbase from 28 to 33mm

Ø77/M

Con staffa diritta esterna in ferro zincato.

Interasse di fissaggio 51÷57mm.

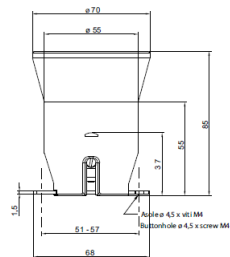

Ø77/M

With straight galvanized iron fixing bracket. Fixing wheelbase from 51 to 57 mm.