

# SEZIONATORI

## DISCONNECTING SWITCHES



6A 250V

SERIE 0136 - 5 POLI

### DATI TECNICI

Tensione nominale:	250 V
Corrente nominale:	6 A
Temperatura di funzionamento:	T140°C
Classe di isolamento:	I e II
Tipo di connessione conduttori:	Morsetto
Capacità connessione morsetti:	0,5 ÷ 4 mm <sup>2</sup>
Grado di protezione:	IP20
Conforme alle norme:	EN 60598-1
Conforme direttiva:	2006/95/CE
Marchi di qualità:	csv

### TECHNICAL DATA

Rated voltage:	250 V
Rated current:	6A
Ambient temperature:	T140°C
Fitting user class:	I and II
Connection type:	Terminal
Terminals connection capacity:	0,5 ÷ 4 mm <sup>2</sup>
Protection degree:	IP20
In conformity with standards:	EN 60598-1
In conformity to directive:	2006/95/CE
Quality standard:	csv

SERIE 0136 - Sezionatore pentapolare

SERIE 0136 - Five poles disconnecting switch

SERIE 0136 - Versioni 4 poli >> vedere altra scheda

SERIE 0136 - Versions 4 poles >> see other dimensions sheet

SERIE 0136 - Versioni 4 poli + TERRA >> vedere altra scheda

SERIE 0136 - Versions 4 poles + earth >> see other dimensions sheet

### CARATTERISTICHE

- Le varianti con fissacavo sono progettate per il serraggio di cavi con diametro compreso fra 8 e 14 mm
- Morsetti standard a mantello con vite sottotesta
- Fissaggi con asolatura per facilitare il montaggio

### FEATURES

- All the variants with a cable clamp can be used to tighten 8 to 14mm diameter cables.
- Standard mantle terminals with under head screw
- Fixing with slotted holes for easy mounting

### MATERIALI

- Corpo in Materiale termoplastico autoestinguente PA66 25% GF V0.
- Contatti femmina in bronzo fosforoso nichelato..
- Contatti maschio in acciaio argentato.
- Morsetti in acciaio zincato



### MATERIALS

- 6.6 polyamide body with 25% fiberglass reinforcement and self extinguishing class V0
- Female contacts in nickel-plated phosphor bronze
- Male contacts in silver plated steel
- Terminals in galvanized steel



# SCHEDA DIMENSIONI SERIE Ø136 5 POLI

## DIMENSIONS SHEET SERIES Ø136 5 POLES

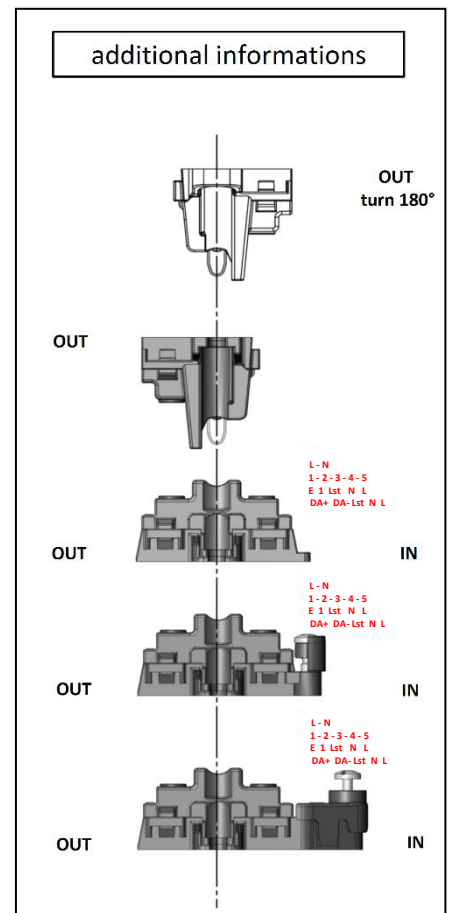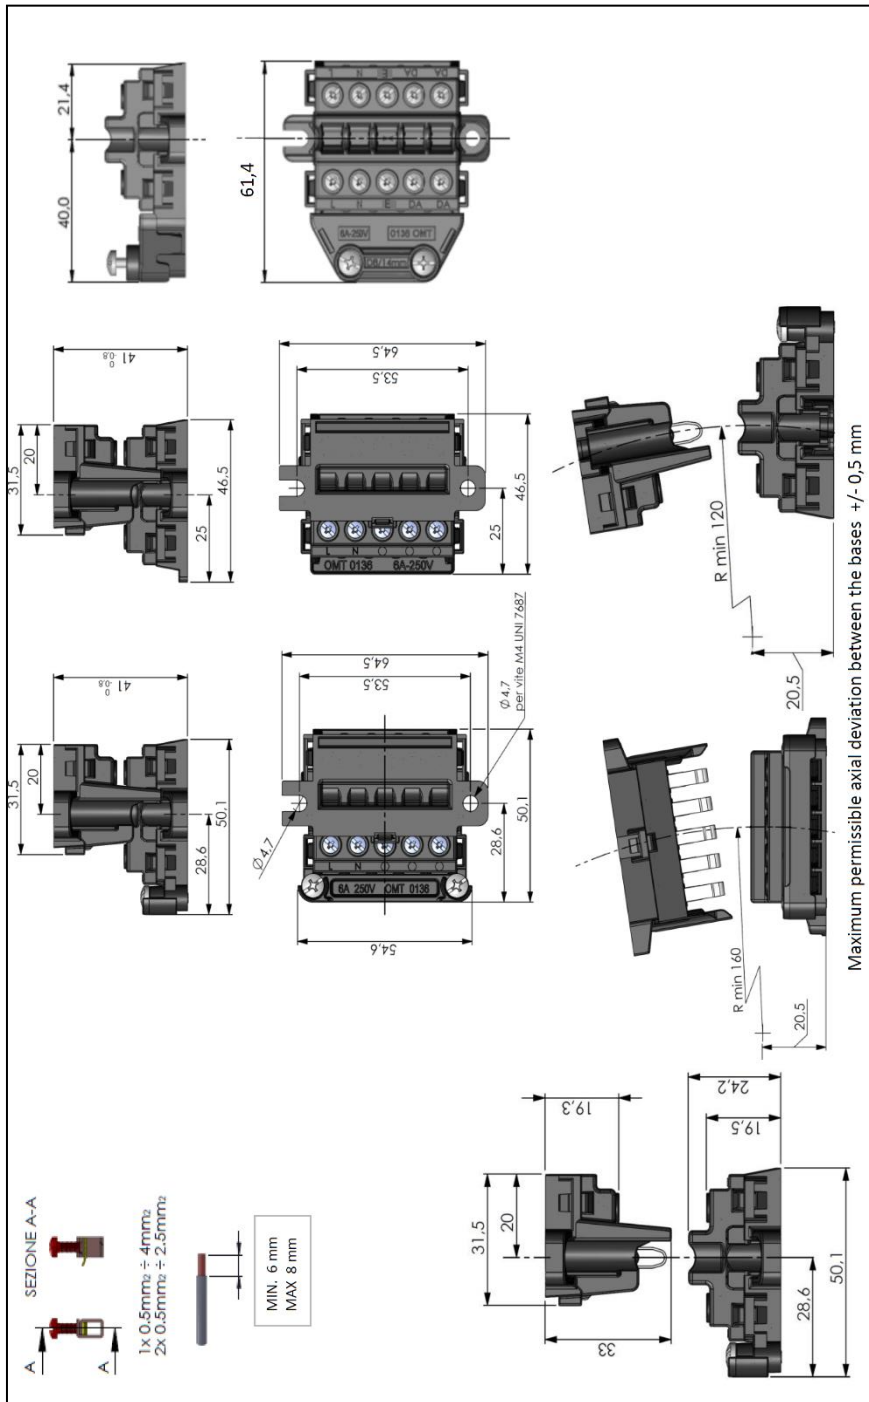

Serie/Series

# 0136 MULTIPOLARI / MULTIPOLAR

Sezionatori multipolari 6A – 250V – 4mm<sup>2</sup>

Multipolar disconnecting switches 6A – 250V 4mm<sup>2</sup>

Basette femmina cinque poli  
Five poles female bases

## 5 P

0000013670

0000013681

Basetta femmina **IN + OUT**  
Female base **IN + OUT**

MARKING L – N

MARKING 1 – 2 – 3 – 4 – 5



0000013672

Basetta femmina solo **IN**  
Female base only **IN**

MARKING L – N

0000013671

Basetta femmina con bloccafili **IN + OUT**  
Female base with wire lock **IN + OUT**

MARKING L – N

0000013673

Basetta femmina con bloccafili solo **IN**  
Female base with wire lock only **IN**

MARKING L – N



0000013655-02

MARKING DA+ DA- Lst N L

0000013656-01

Basetta femmina con bloccafili **IN + OUT**  
Female base with wire lock **IN + OUT**

MARKING E 1 Lst N L

0000013674

0000013684

Basetta femmina con fissacavo **IN + OUT**  
Female base with cable clamp **IN + OUT**

MARKING L – N

MARKING 1 – 2 – 3 – 4 – 5



**Basette maschio cinque poli**  
*Five poles male bases*

**5 P****0000013676**

Basetta maschio tronca + **OUT**  
*Male base trunc + **OUT***

**0000013677**

Basetta maschio tronca - (non abbinabile a basette femmina solo **IN** )  
*Male base trunc – (not suitable with female base only **IN**)*